

eVIEW SUPREME SERIAL ANNUNCIATOR

AS1172-10 Red Color
AS1172-30 Gray Color



Standard Features

- Available in Red or Gray
- Up to 15 annunciators can be connected to each Supreme or Supreme-RS fire control panel
- Large liquid crystal display (240 x 64 pixels)
- High brightness LED indications
- Internal sounder
- Replicates all panel controls (Supreme / Supreme-RS)
- Simple, two-wire serial connection
- Small, Supreme style enclosure
- Removable electronics for easy installation
- 24V DC powered
- Low power consumption
- Multi-language options
- Connection supervised by Supreme fire control panel
- Recess mounting using optional AS1173 kit

Product Overview

Designed and manufactured to the highest standards in a quality controlled environment the eVIEW fire alarm annunciator provides a simple and convenient method of extending the controls and indications of the Supreme fire alarm control panel to other locations.

The large, graphic LCD and high brightness LED indicators duplicate the indications on the Supreme fire alarm control panel at up to 15 additional locations via a simple, two-wire serial data connection.

The eVIEW is powered by 24V DC (which can be via an additional 2 conductors from the control panel or local 24V DC listed supply).

eVIEW is housed in a small enclosure which is styled similarly to the Supreme control panel and is ideal for installations where a large control panel would be detrimental to decor such as entrance halls.

Up to 15 eVIEW annunciators can be connected to each control panel on the Supreme network making eVIEW ideal where multiple points of indication and/or control are required, such as nurses stations or shop units.

Technical Specifications


Supply Voltage	21 - 30VDC
Current Draw (Standby)	20mA @ 24VDC
Current Draw (Alarm)	110mA @ 24VDC
Size	9.25" x 6.7" x 2.2" (235 mm x 170 mm x 55 mm)
Display	8 Line x 40 Characters LCD Display ((320 Total)
Construction	18 AWG, 1.2 mm mild sheet steel
Cable Entry	4 knockouts in backbox, 1 in left side, 1 in right side
Dimensions	10.4"(W) x 7.5"(H) x 1.6"(D)
Weight	3.5lbs
Finish	Epoxy Powder Coated
Color	<ul style="list-style-type: none"> ● Red (RAL3002) ● Gray (BS 00 A 05)
Serial Data Connection	2 core RS485 (Up to 3937 feet total Cable Length)
Operating Temperature Range	32°F (0°C) to 120°F (49°C)
Relative Humidity	85% RH Non-Condensing

Trim Ring Specifications

Outer Dimensions	11.3"(W) x 8.6"(H) x 1.3"(D)
Inner Dimensions	10.3"(W) x 7.4"(H)
Finish	Epoxy Powder Coated
Color	<ul style="list-style-type: none"> ● Red (RAL3002) ● Gray (BS 00 A 05)

Ordering Codes

AS1172-10	eView Serial Annunciator - Red Color
AS1172-40	eView Serial Annunciator - Gray Color
AS1173-10	Trim Ring for recess mounting - Red Color
AS1173-40	Trim Ring for recess mounting - Gray Color

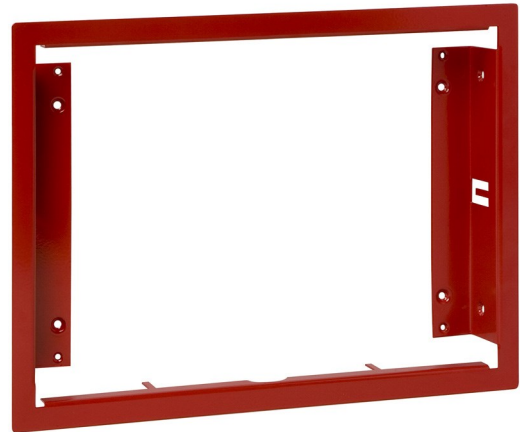

The VES trim ring allows the eVIEW annunciator to be easily recess mounted. Avenger trim rings provides placement tabs that fold behind dry wall. Traditional screw mounting is available by 2 openings in each of the vertical frames. Conduit entry is not blocked by trim ring.

