

Conventional Pull Stations

AS3036-10 Single Action w/ Hex Lock (H) AS3037-10 Single Action w/ Key Lock (H) AS3038-10 Dual Action w/ Hex Lock (H) AS3039-10 Dual Action w/ Key Lock (H)



Standard Features

- Metal Construction Enclosed switch
 with glass rod (included)
- 10 Amps @ 120 VAC
- Available in Single Action and Dual Action
- UL Listed
- Made in USA

Product Overview

Avenger Conventional Pull Stations are available in four models:

- AS3036-10 single action with Hex lock
- AS3037-10 single action with Key lock
- AS3038-10 dual action with Hex lock
- AS3039-10 dual action with Key lock

Each model is constructed of a solid die cast housing and comes in glossy red. The back switch plate is plated steel. The electrical switch is rated for 10 Amps @ 120 VDC normally open contact rating. All models are connected via terminal block connections.


Engineering Specifications


Manual pull stations shall be Avenger Systems Conventional, single or dual action models, AS3036-10, AS3037-10, AS3038-10 or AS3039-10. Models shall be made of 14 AWG CRS and painted with Red enamel. Electrical switch must be rated 10Amps @ 120 VDC. The words Fire Alarm shall be in a contrasting color and be embossed text 1/2" tall. Manual pull stations shall be Underwriters Laboratories Inc. Listed and be installed within the limits defined in the Americans With Disabilities Act.



Fire Detection System by Avenger , Las Vegas, Nevada 89141 U.S.A. | Phone: 1-702-513-4654 Info@avengersystems.com | www.avengersystems.com

VERSION 2.03 - 2017/03

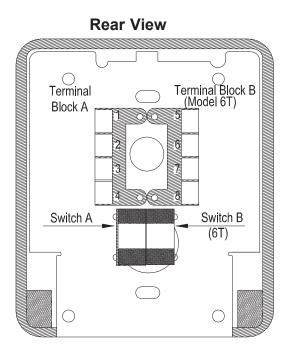




SPECIFICATION

Model	AS3036-10, AS307-10, AS3038-10, AS3039-10
Contact	SPST Form "A"
Terminal Block	A
Terminal Connecting	2 & 3
Terminal Connection LED	1 (+) & 4 (-)
Terminal Connection Switch	1 & 4
Terminal Connection Phone Jack	1 & 4
Contact Rating	10A @ 120 VAC
Operating Temperature	-30°F (-35 °C) ~ 150°F (66°C)

ELECTRICAL WIRING



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For more information, contact Avenger. Phone: 800.270.3066



Fire Detection System by Avenger , Las Vegas, Nevada 89141 U.S.A. | Phone: 1-702-513-4654 Info@avengersystems.com | www.avengersystems.com